


DECADE BOX

Models BR04, BR05, BR06, BR07 & BC05

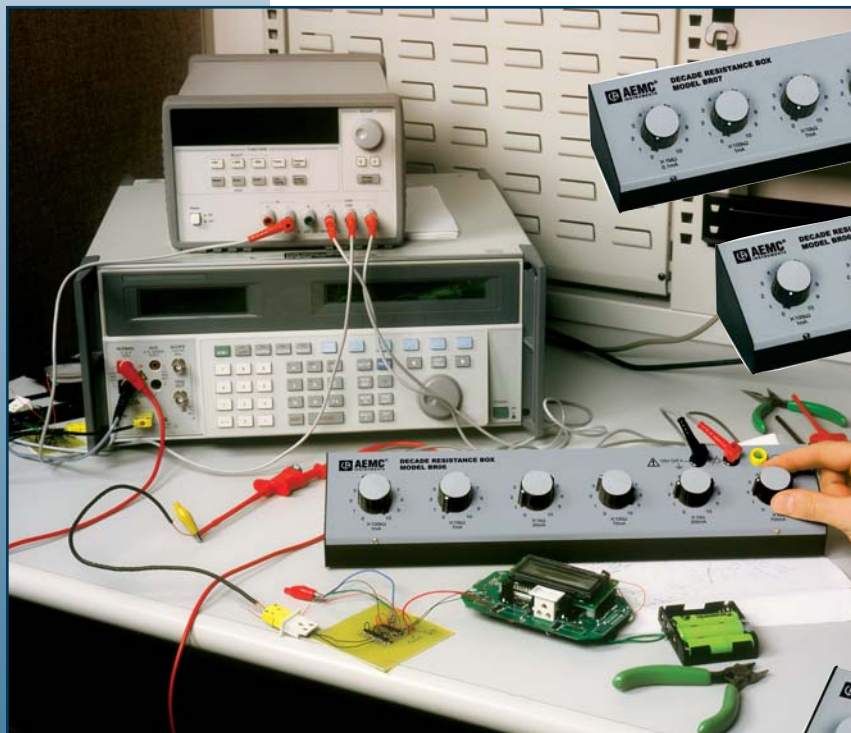

- Capacitance and Resistance Decade Boxes
- Rotary switch selector
- Stop position to prevent accidental switching from 10 to 0
- Male ground (earth) terminal with safety jack
- Outputs on Ø 4mm safety terminals
- Ground jumper lead EN 61010-2-031, 150V Cat. II, 50V Cat. III, Pollution Degree 2
- Accuracy 1% (Resistance)
- Accuracy 3% (Capacitance)

These decade boxes are built into a metal bench top box. They are used for testing and calibration.

The main function of these decade boxes is to create a resistance or capacitance with a specific value by using a combination of the rotary decade switches.

They are equipped with Ø 4mm safety terminals for connection. Designed to international safety standard EN 61010-1.

SPECIFICATIONS

Resistance Decade Boxes

MODELS		BR04	BR05	BR06	BR07
RANGE					
Decade	1	1 to 10Ω	1 to 10Ω	1 to 10Ω	1 to 10Ω
	2	10 to 100Ω	10 to 100Ω	10 to 100Ω	10 to 100Ω
	3	100Ω to 1kΩ	100Ω to 1kΩ	100Ω to 1kΩ	100Ω to 1kΩ
	4	1 to 10kΩ	1 to 10kΩ	1 to 10kΩ	1 to 10kΩ
	5	–	10 to 100kΩ	10 to 100kΩ	10 to 100kΩ
	6	–	–	100kΩ to 1MΩ	100kΩ to 1MΩ
	7	–	–	–	1 to 10MΩ
MAX CURRENT (mA_{DC})					
Decade	1	700mA	700mA	700mA	700mA
	2	200mA	200mA	200mA	200mA
	3	70mA	70mA	70mA	70mA
	4	20mA	20mA	20mA	20mA
	5	–	7mA	7mA	7mA
	6	–	–	1mA	1mA
	7	–	–	–	0.1mA
MEASUREMENTS					
Resistance Range		1Ω to 11.11kΩ	1Ω to 111.11kΩ	1Ω to 1.11111MΩ	1Ω to 11.11111MΩ
Accuracy		1%	1%	1%	1%


Capacitance Decade Boxes

MODEL		BC05
RANGE		
Decade	1	0.1 to 1nF
	2	1 to 10nF
	3	10 to 100nF
	4	100nF to 1μF
	5	1 to 10μF
MEASUREMENTS		
Total Capacitance		11.111μF
Residual Capacitance		25pF (approx.)
Accuracy		3% (low residual capacitance)
Max Operating Voltage		300V _{DC} , 230V _{AC} (50Hz)


APPLICATIONS

- Simulate in-circuit conditions on design projects
- Use in calibration and test procedures
- Simulate changing conditions
- Determine optimum values for circuit designs


CONSTRUCTION

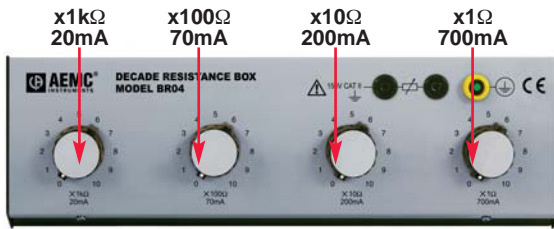


Model BR04

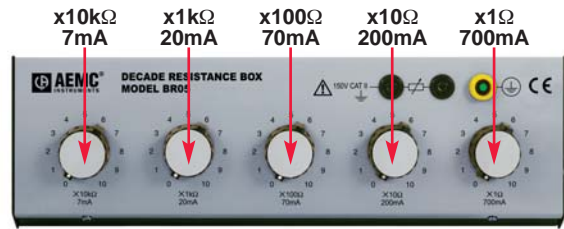


Model BR05

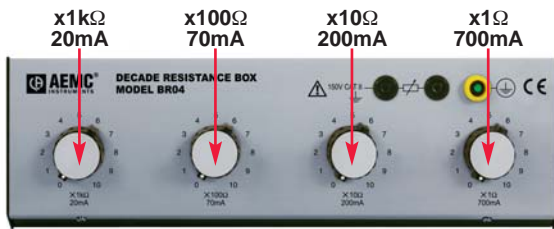

Model BR06

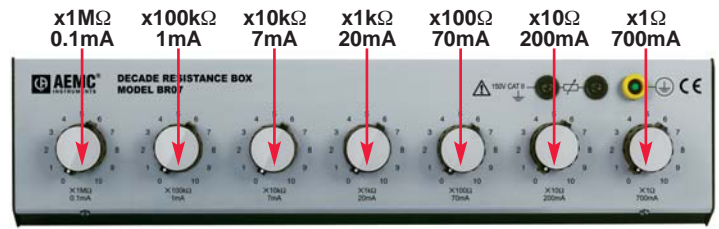

Model BR07

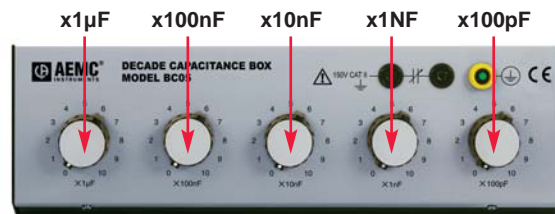

Model BC05

ORDERING INFORMATION	CATALOG NO.
Resistance Decade Box Model BR04 (x1Ω, x10Ω, x100Ω, x1kΩ, 1%)	Cat. #2131.22
Resistance Decade Box Model BR05 (x1Ω, x10Ω, x100Ω, x1kΩ, x10kΩ, 1%)	Cat. #2131.23
Resistance Decade Box Model BR06 (x1Ω, x10Ω, x100Ω, x1kΩ, x10kΩ, x100kΩ, 1%)	Cat. #2131.24
Resistance Decade Box Model BR07 (x1Ω, x10Ω, x100Ω, x1kΩ, x10kΩ, x100kΩ, x1MΩ, 1%)	Cat. #2131.25
Capacitance Decade Box Model BC05 (x0.1nF, x1nF, x10nF, x100nF, x1knF, e%)	Cat. #2131.26
Includes ground jumper lead and user manual	

ONE SOURCE

For All Your Electrical Test & Measurement Instruments



Call the AEMC® Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: **(800) 343-1391**

Chauvin Amoux®, Inc. d.b.a AEMC® Instruments • 200 Foxborough Blvd. • Foxborough, MA 02035 USA • (800) 343-1391 • (508) 698-2115 • Fax (508) 698-2118

Visit our website at www.aemc.com

950.BR-DECADBOX-WEB 01/05 Rev. 04