

BATTERY HiTESTER BT3563,BT3562,3561

Component measuring instruments



Simultaneous high-speed measurement of internal resistance and battery voltage

From large-cell to high-voltage battery testing - HIOKI is The Choice

The BT3563, BT3562, and 3561 BATTERY HiTESTERs support simultaneous high-speed measurement of internal resistance (IR) and battery voltage (OCV) for the ever-expanding production lines of increasingly larger lithium-ion low resistance batteries, and other battery packs for high voltage applications.

- Measure high-voltage battery packs up to 300V (with the BT3563)
- Ideal for high-precision cell voltage measurements (accurate to 0.01% of reading)
- Measurement circuitry employs enhanced current regulation
- Fast 10 ms response and 8 ms sampling time for high-speed measurements (with the BT3563 and BT3562)
- Ranges from 3 mΩ to 3000 Ω (with the BT3563 and BT3562) support coin-size to large-cell batteries

Resistance and voltage measurements

BATTERY HiTESTER BT3563 BT3562 3561



■ Measurement Parameters and Applications

- High-voltage battery pack testing
- Battery module testing
- Large (low-resistance) cell testing
- High-speed mass production testing of coin batteries
- Fuel cell stack measurements
- Battery research and development measurement applications

BT3563
Up to
300V


BT3562
Up to
60V



Voltage measurement ranges: 6V/60V/300V (BT3563)
6V/60V (BT3562)

Resistance measurement ranges: 3mΩ/30mΩ/300mΩ/
3Ω/30Ω/300Ω/3000Ω

Lithium-Ion and Secondary Batteries

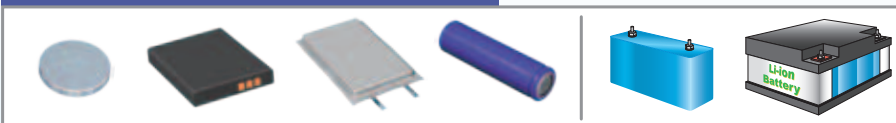

Cell phones



E-books



Electric bicycles



Electric scooters



EV/HEV

Battery-Powered Devices

■ Advanced Functions

● Four-Terminal AC Method

The four-terminal, 1-kHz AC method uses four contact probes to measure resistance independently of that of the measurement leads.

● Measurement Error Detection

Detects test probe contact failure and broken leads, for 100% measurement reliability.

● Self-Calibrating

Minor drift and gain fluctuations within the internal measurement circuitry are automatically corrected to maintain high accuracy.

● Averaging Function

Stable readings can be consistently obtained by averaging two to 16 measurements.

to confirm finished quality

■ Features of Battery HiTester Series

High Precision

Resistance
 $\pm 0.5\%$ rdg. ± 5 dgt.
Voltage
 $\pm 0.01\%$ rdg. ± 3 dgt.

Common to the BT3563, BT3562 and 3561

High Resolution

Resistance: $0.1 \mu\Omega$ ^{*1}
(3 m Ω range)
Voltage: $10 \mu V$ ^{*1}
(6 V range)

^{*1} BT3563 and BT3562

Quick Response

Resistance & Voltage
Simultaneous measurements
within 18 ms ^{*2}

^{*2} Sampling time + response time:
 with EX.FAST sampling
 BT3563 and BT3562

- The 3 m Ω range (with $0.1 \mu\Omega$ resolution) is ideal for testing ever lower-resistance large cells (BT3563 and BT3562).
- The 6 V range (with $10 \mu V$ resolution and 0.01% accuracy) is ideal for the high-precision voltage measurements required for cell testing (BT3563 and BT3562).

- Provides high-speed measurement of high-voltage^{*3} battery packs, for improving productivity (BT3563).

^{*3} BT3563: up to 300V
 BT3562: up to 60V

■ Measurement Parameters and Applications

BATTERY HiTESTER 3561



- For high-speed production line testing of small battery packs for mobile and portable communications devices
- For high-speed production line testing of small cells
- *High-speed 10ms inspection in the 300m Ω and 3 Ω ranges*
- *Improve inspection efficiency during mass production of compact cells*

3561
 Up to
20V



Voltage measurement ranges: 20V
Resistance measurement ranges: 300m Ω /3 Ω

Lithium-Ion and Secondary Batteries

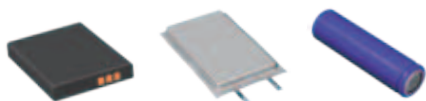

Battery-Powered Devices

Quick Response with small cell measurement

Resistance & Voltage
Simultaneous measurements
within 10 ms ^{*4}

^{*4} Sampling time + response time:
 with EX.FAST sampling
 3561

Battery HiTester Series

● Measurement Value Storage

Store up to 400 measurement values by external trigger input, for bulk transfer to a computer.

● Statistical Calculations

Apply statistical calculations to up to 30,000 data points to facilitate process and quality control.

● Save Measurement Setting Configurations

Up to 126 measurement configurations such as comparator setting criteria can be saved and reloaded. Saved configurations can be selected by external control.

Automatic Testing Lines

High Speed Interfaces

The fastest 10 ms measurement data can be transferred via the standard RS-232C interface at up to 38,400 bps. Models with the -01 suffix include a GP-IB interface.

Handler Interface

Triggering, measurement configuration loading, and zero adjustment can be externally controlled. Output signals provide comparator results, end-of-measurement events, and measurement errors. (Because the BT3563/BT3562 are different from the 3561, consult each model's Instruction Manual for specific details or designs.)

| BT3563, BT3562 and 3561 External I/O Items | |
|---|---|
| Input (no-voltage contacts ^{*1}) | Output (open collector ^{*1}) |
| <ul style="list-style-type: none">Measurement trigger (TRIG)Print (PRINT)Zero adjustment (OAJ)Calibrate (CAL)Manual comparator (MANU)Load panel settings (7 bits) (LOAD0 to LOAD6) | <ul style="list-style-type: none">End-of-Measurement (EOM)Measurement-in-progress (INDEX)Comparator results (R-Hi, R-Lo, V-Hi, V-IN, V-Lo, PASS, FAIL^{*2})Measurement error (ERR)General-purpose output (OUT1 to OUT9) (only 3561) |

^{*1} The input and output signals of the BT3563 and BT3562 are isolated via photocouplers.


■ EXT I/O Connectors (BT3563 and BT3562, accessories not supplied)

| | |
|--------------------------------------|---|
| Installed connector (HiTester side): | 37-pin D-SUB accepts #4-40 screws |
| Mating connectors: | DC-37P-ULR (solder type) or DCSP-JB37PR (welded type) from Japan Aviation Electronics Industry, Ltd., or equivalent |


■ EXT I/O Connectors (3561, accessories not supplied)

| | |
|--------------------------------------|---|
| Installed connector (HiTester side): | 57RE-40360-730B (D29) (DDK) |
| Mating connectors: | 57-30360 (DDK), RC30-36P (Hirose Electric Co., Ltd.), or equivalent |


BT3563-01 and BT3562-01 Rear Panel

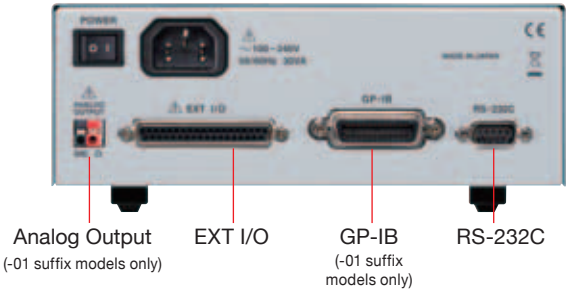

3561-01 Rear Panel

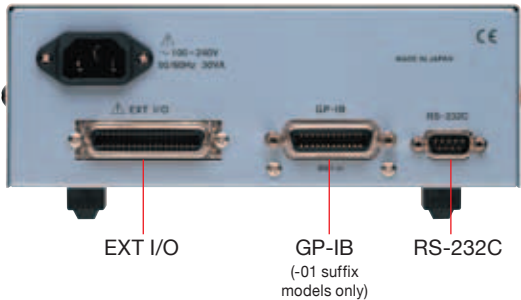

BT3563 and BT3562 External I/O Timing Chart

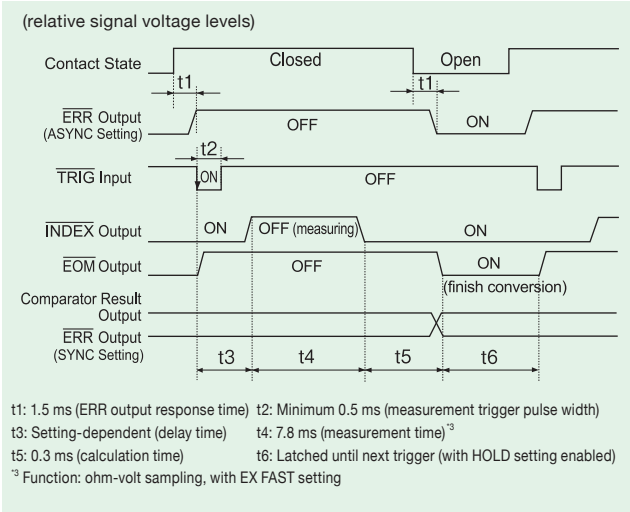

Comparator Functions

Judges Resistance & Voltage Simultaneously

Resistance and voltage can be simultaneously judged Hi/IN/Lo by independent comparators. Judgment results are provided on the display, beeper, and external I/O. The display allows confirming both results at a glance.



Composite Judgment Result Output

External I/O provides both separate and combined outputs of resistance and voltage judgment results, so composite results can be monitored.

Alternative Setting Methods

Set judgment thresholds by specifying high/low (Hi/Lo) values or by specifying a standard value and deviation (%).

Manual Comparator

Comparator judgments can be executed only when required, supporting flexible control by footswitch or PLC.

Dual Beep Tones


Different beep tones distinguish IN and Hi/Lo judgments. Both tones can be independently enabled or disabled.

Multiple Recording Methods

■ Analog Output (BT3563-01 and BT3562-01 only)

The BT3563-01 and BT3562-01 provide analog output of resistance measurement values. This is convenient for combining recorded data from multiple locations or of various data types, such as for logging long-term measurements and for fuel cell evaluation.

| | |
|-----------------|--|
| Output contents | Measured resistance (displayed value) |
| Output rate | 0 to 3.1 V DC (corresponding to displayed value of 0 to 31000) |
| Resolution | 12 bits |
| Response time | 10 ms |

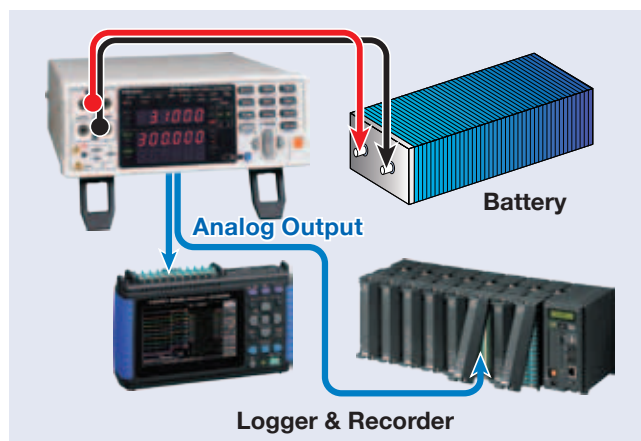


■ PC Application Program

Measurement data can be transferred to a PC for importing to a spreadsheet program or storage as CSV files. Interval and manual measurements can be triggered by a keystroke or external trigger signal.

Download the PC application program from our website:

<http://www.hioki.com/>

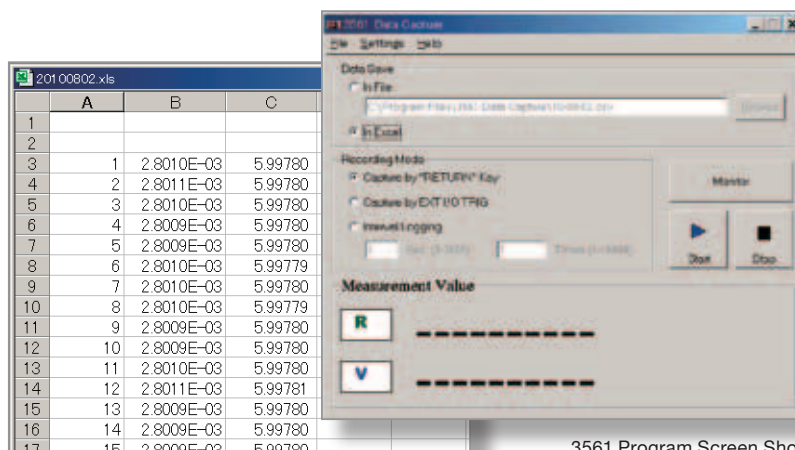

Excel Import Example

3561 Program Screen Shot

■ Data Printing

Measurement values, and those including judgment results and statistical calculation results can be printed using an RS-232C-compatible printer.

● Interval Printing

Elapsed time and measurement values can be printed over a specified interval. The interval can be set from 1 to 3,600 seconds.

● Requirement specification (printer)

The requirements for a printer to be connected to the instrument are as follows. Confirm compatibility and make the appropriate settings on the printer before connecting it to the instrument.

| | |
|---------------------|---------------|
| Interface | : RS-232C |
| Characters per line | : At least 40 |
| Communication speed | : 9600 bps |
| Data bits | : 8 |
| Parity | : none |
| Stop bits | : 1 |
| Flow control | : none |

| | | |
|-------------------------|-------------|---|
| 1 2 3 4 5 | | BT3563/BT3562/3561 (9-pin) Connector |
| 6 7 8 9 | | |
| Function | Signal name | Pin |
| Receive Data | R x D | 2 |
| Transmit Data | T x D | 3 |
| Signal or Common Ground | GND | 5 |

ASCII data will be sent from the BT3563/BT3562/3561. Please use a printer that can output plain text.

For the RS-232C cable, the connector at the instrument end should be a molded type. The metal type (with hooks preventing the surface from being flat) will not fit due to the instrument's design.

Printout Examples

```

1 2.5375mOhm, 4.70056 V
2 - 0.9730mOhm, 4.70055 V
3 0.F., 0.F.
4 -----
5 15.039 Ohm, - 50.254 V
6 200.12 Ohm, 11.3178 V
7 2.9984kOhm, -11.3099 V
8 0.1615 Ohm, -4.70054 V
9 0.166 Ohm, - 4.7006 V
10 0.16 Ohm, - 4.700 V

```

Measurement Values

```

50 5.033 Ohm Hi, 1.60427 V
51 5.033 Ohm Hi, -0.00001 V
52 17.655mOhm IN
53 18.354mOhm Hi
54 15.322mOhm Lo

```

Measurement Values
and Judgment Results

```

*** RESISTANCE ***
Number      85
Valid       85
Average     13.06 Ohm
Max         13.78 mOhm ( 74)
Min         12.10 mOhm ( 3)
Sn          0.38mOhm
Sn-1        0.38mOhm
Cp          1.32
CpK         0.09
Comp Hi     40
Comp IN     45
Comp Lo     0

*** VOLTAGE ***
Number      85
Valid       85
Average     10.0074 V
Max         10.0197 V ( 57)
Min         9.9938 V ( 31)
Sn          0.0068 V
Sn-1        0.0068 V
Cp          0.35
CpK         0.32
Comp Hi     10
Comp IN     58
Comp Lo     16

```

Statistical Calculations
and Judgment Results

■ Specifications

● BT3563,BT3562 and 3561 Specifications

| | |
|-------------------------------|---|
| Measurement types | Resistance and voltage |
| Resistance measurement method | Four-terminal AC (1 kHz) method |
| Functions | ΩV, Ω and V |
| Rated voltage | [BT3563(-01)] ±300 VDC rated input voltage ±300 VDC maximum rated voltage to ground [BT3562(-01)] ±60 VDC rated input voltage ±70 VDC maximum rated voltage to ground [3561(-01)] ±22 VDC rated input voltage ±70 VDC maximum rated voltage to ground |
| Input resistance | [BT3563(-01) and BT3562(-01)] 3 mΩ/30 mΩ/300 mΩ ranges: Approx. 90 kΩ 3 Ω/30 Ω/300 Ω/3000 Ω ranges: Approx. 1 MΩ [3561(-01)] Approx. 1MΩ |
| Sampling rate | Four steps – Extra Fast, Fast, Medium or Slow |
| Response time | [BT3563(-01) and BT3562(-01)] Approx. 10 ms for measurements Note: Response time depends on reference values and the measurement object. [3561(-01)] Approx. 3 ms for measurements Note: Response time depends on reference values and the measurement object. |
| Total measurement time | Sampling time + Response time |

| | |
|-----------------------------------|---|
| Zero-adjustment | 1000 count range (both resistance and voltage) |
| Triggering | Internal or external |
| Delay time | On/off, 0 to 9.999 seconds |
| Averaging samples | On/off, 2 to 16 samples |
| Statistical calculations | Total data count; valid data count; maximum, minimum and average values; standard deviation; population standard deviation and process capability indices |
| Measurement value output function | Measurement values are output via RS-232C upon trigger input |
| Measurement value memory | Up to 400 measurements |
| Panel save/load | Up to 126 configuration settings Save Frequently Used Settings in Memory: Measurement function, resistance measurement range, auto-range setting, zero-adjust setting data, sampling rate, trigger source, delay setting, averaging and comparator settings, statistical calculation setting, display switching and key-lock. |
| Analog Output | [BT3563-01 and BT3562-01 only] Measured resistance (displayed value, from 0 to 3.1 VDC) |
| External interface | External I/O, RS232C (9600, 19200 or 38400 bps), Printer RS-232C (all models), GP-IB (Model BT3563-01, BT3562-01 and 3561-01 only) |
| Other functions | Over-range display, measurement error detection, self-calibration, dual comparators, key-lock |

● BT3563,BT3562 and 3561 General Specifications

| | |
|--|--|
| Operating temperature & humidity | 0 to 40°C, 80% rh or less (non-condensating) |
| Storage temperature & humidity | -10 to 50°C, 80% rh or less (non-condensating) |
| Guaranteed accuracy temperature & humidity | 23°C ±5°C, 80% rh or less (non-condensating) |
| Operating conditions | Indoors, below 2000 m ASL |
| Rated supply voltage | 100 to 240 VAC (auto-selecting) |
| Rated supply frequency | 50/60 Hz |
| Rated power consumption | 30 VA |

| | |
|--------------------------------|--|
| Insulation withstand potential | [BT3563(-01), BT3562(-01)] 1.39 kV AC for 15 s (with 10 mA cut-off current) between all mains supply terminals and protective ground terminal 2.224 kV AC for 15 s (with 1 mA cut-off current) between all measurement jacks and interfaces 1.39 kV AC for 15 s (with 1 mA cut-off current) between all measurement jacks and protective ground terminal [3561(-01)] 1.69 kVAC for 15 s (with 10 mA cutoff current) between all mains supply terminals and protective ground, interfaces, and measurement jacks |
| Dimensions | Approx. 215W × 80H × 295D mm (without projections) |
| Mass | Approx. 2.4 kg |
| Accessories | Power Cord (1) |
| Applicable Standards | Safety EN61010-1 EMC EN61326 EN61000-3-2 EN61000-3-3 |

● BT3563 and BT3562

[Sampling Times]

| Function | | EX.FAST | FAST | MEDIUM | SLOW |
|----------|---------|---------|-------|--------|--------|
| ΩV | (50 Hz) | 8 ms | 24 ms | 84 ms | 259 ms |
| | (60 Hz) | | | 70 ms | 253 ms |
| Ω | (50 Hz) | 4 ms | 12 ms | 42 ms | 157 ms |
| | (60 Hz) | | | 35 ms | 150 ms |
| V | (50 Hz) | 4 ms | 12 ms | 42 ms | 157 ms |
| | (60 Hz) | | | 35 ms | 150 ms |

Items in the parentheses () indicate supply frequency settings; Tolerance: ±5 ms for SLOW sampling, and ±1 ms for other settings.

● 3561

[Sampling Times]

| Function | | EX.FAST | FAST | MEDIUM | SLOW |
|----------|---------|---------|-------|--------|--------|
| ΩV | (50 Hz) | 7 ms | 23 ms | 83 ms | 258 ms |
| | (60 Hz) | | | 69 ms | 252 ms |
| Ω | (50 Hz) | 4 ms | 12 ms | 42 ms | 157 ms |
| | (60 Hz) | | | 35 ms | 150 ms |
| V | (50 Hz) | 4 ms | 12 ms | 42 ms | 157 ms |
| | (60 Hz) | | | 35 ms | 150 ms |

Items in the parentheses () indicate supply frequency settings; Tolerance: ±5 ms for SLOW sampling, and ±1 ms for other settings.

■ Measurement Ranges and Accuracy (Guaranteed Accuracy Period: 1 year)

● BT3563, BT3562 and 3561 Conditions of Guaranteed Accuracy

Temperature & humidity:

23 °C ±5 °C, 80% rh or less (non-condensating)

Zero-adjustment: After executing zero-adjustment

Warm-up time: At least 30 min.

Self-calibration:

Unless using SLOW sampling, execute self-calibration after warm-up and restrict temperature fluctuations to within ±2 °C after calibration.

● About Accuracy

Accuracy is calculated from the reading error (±% rdg.) determined by the measurement value and range, and the digit error (± dgt.).

Calculation Example

Measurement value: 1 Ω, Measurement range: 3 Ω

Specified accuracy (from table below): ±0.5% rdg., ±5 dgt.

(A) Reading error (±% rdg.): 1 [Ω] × 0.5% = ±0.005 [Ω]

(B) Digit error (± dgt.): ±5 dgt. = ±0.0005 [Ω] (at 0.0001 Ω resolution)

(C) Total error (A + B): ±0.0055 [Ω]

Applying total error (C) to the measurement value of 1 Ω gives an error limit of 0.9945 to 1.0055 Ω.

● BT3563 and BT3562 [Resistance Measurement]

| Range | 3 mΩ | 30 mΩ | 300 mΩ | 3 Ω | 30 Ω | 300 Ω | 3000 Ω |
|-----------------------------------|----------------------------|-----------|------------------------------|----------|----------|----------|----------|
| Maximum display Value | 3.1000 mΩ | 31.000 mΩ | 310.00 mΩ | 3.1000 Ω | 31.000 Ω | 310.00 Ω | 3100.0 Ω |
| Resolution | 0.1 μΩ | 1 μΩ | 10 μΩ | 100 μΩ | 1 mΩ | 10 mΩ | 100 mΩ |
| Measurement Current ^{*1} | 100 mA | 100 mA | 10 mA | 1 mA | 100 μA | 10 μA | 10 μA |
| Measurement Current Frequency | 1 kHz ±0.2 Hz | | | | | | |
| Accuracy ^{*2} | ±0.5% rdg. ±10 dgt. | | ±0.5% rdg. ±5 dgt. | | | | |
| Temperature coefficient | (±0.05% rdg. ±1 dgt.) / °C | | (±0.05% rdg. ±0.5 dgt.) / °C | | | | |
| Open-Circuit Voltage | 25 Vpeak | | 7 Vpeak | 4 Vpeak | | | |

*1 Measurement current accuracy is ±10%.

*2 30 mΩ to 3000 Ω ranges: Add ±3 dgt. for EX FAST, or ±2 dgt. for FAST and MEDIUM
3mΩ range: Add ±30 dgt. for EX FAST, or ±10 dgt. for FAST, or ±5 dgt. for MEDIUM

[Voltage Measurement]

| Range | 6 V | 60 V | 300 V (only BT3563) |
|-------------------------|-------------------------------|------------|---------------------|
| Maximum display Value | ±6.00000 V | ±60.0000 V | ±300.000 V |
| Resolution | 10 μV | 100 μV | 1 mV |
| Accuracy ^{*3} | ±0.01% rdg. ±3 dgt. | | |
| Temperature coefficient | (±0.001% rdg. ±0.3 dgt.) / °C | | |

*3 Add ±3 dgt. for EX FAST, or ±2 dgt. for FAST and MEDIUM

● 3561 [Resistance Measurement]

| Range | 300 mΩ | 3 Ω |
|-----------------------------------|------------------------------|----------|
| Maximum display Value | 310.00 mΩ | 3.1000 Ω |
| Resolution | 10 μΩ | 100 μΩ |
| Measurement Current ^{*4} | 10 mA | 1 mA |
| Measurement Current Frequency | 1 kHz ±0.2 Hz | |
| Accuracy ^{*5} | ±0.5% rdg. ±5 dgt. | |
| Temperature coefficient | (±0.05% rdg. ±0.5 dgt.) / °C | |
| Open-Circuit Voltage | 7 Vpeak | |

*4 Measurement current accuracy is ±10%.

*5 Add ±3 dgt. for EX FAST, or ±2 dgt. for FAST and MEDIUM

*6 Add ±3 dgt. for EX FAST, or ±2 dgt. for FAST and MEDIUM

● 3561 [Voltage Measurement]

| Range | 20V |
|-------------------------|-------------------------------|
| Maximum display Value | ±19.9999 V |
| Resolution | 0.1 mV |
| Accuracy ^{*6} | ±0.01% rdg. ±3 dgt. |
| Temperature coefficient | (±0.001% rdg. ±0.3 dgt.) / °C |

■ Option Configurations

● Main unit



BATTERY HiTESTER BT3563

BT3563-01 (with GP-IB and analog output)

BATTERY HiTESTER BT3562

BT3562-01 (with GP-IB and analog output)


BATTERY HiTESTER 3561

3561-01 (with GP-IB)

- Measurement leads are not included. Purchase the appropriate lead option for your application separately.
- The male (system side) of the EXT I/O connector is also available. Please inquire with your HIOKI distributor.

● Options (measurement leads)

Measurement lead (for measuring high voltage batteries with Models BT3563 and BT3562)

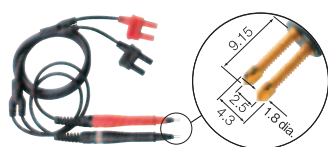

PIN TYPE LEAD L2100

A:300 mm, B:172 mm, L:1400 mm
for high voltage battery measurements,
600 VDC max., BT3563 and BT3562 only


Zero adjustment board (for L2100 only)



ZERO ADJUSTMENT BOARD
9454
for L2100 only

Cannot be used for
zero adjusting the
9770 and 9771 Pin
Type Leads

About probe length



A: between junction and
probe
B: probe length
L: between connector and
probe tip

Measurement leads (for measuring batteries up to 60 V with BT3563, BT3562, or 3561)



CLIP TYPE LEAD 9287-10
A:130 mm, B:83 mm, L:1100 mm, 70 VDC



FOUR TERMINAL LEAD 9453
A:280 mm, B:118 mm, L:1360 mm, 60 VDC




LARGE CLIP TYPE LEAD 9467
A:300 mm, B:116 mm, L:1360 mm, 50 VDC

Not CE marked.
29mm diameter


Mainly for Small Secondary Batteries (with very small terminals)

1.8 mm dia. single-axis type for measuring
small electrodes

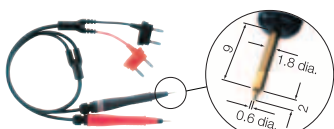

PIN TYPE LEAD 9770 9770 tip shape
A:260 mm, B:140 mm, L:850 mm,
70 VDC

0.2 mm parallel pyramid-type pins for measuring
at thru holes and sub-millimeter objects

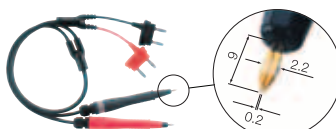


PIN TYPE LEAD 9771 9771 tip shape
A:260 mm, B:138 mm, L:850 mm,
70 VDC

Measurement leads (3561 only)



CLIP TYPE LEAD 9452
A:220 mm, B:197 mm, L:1360 mm




9452 tip shape

Measurement leads (for maximum precision, 3561 only)



PIN TYPE LEAD 9455
A:260 mm, B:136 mm, L:890 mm



9455 pin (enlarged)

Note: The 9455 is a precision instrument. Exercise appropriate care when handling it. Not CE marked.

● Options (Interface Cables)

Interface (RS-232C and GP-IB) Connection cables



RS-232C CABLE 9637
9- to 9-pin crossover, 1.8 m



RS-232C CABLE 9638
9- to 25-pin crossover, 1.8 m



**GP-IB CONNECTOR
CABLE 9151-02**
2 m

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.

TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED

TEL +91-124-6590210 FAX +91-124-6460113
E-mail: hioki@hioki.in

HIOKI SINGAPORE PTE. LTD.

TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.

TEL +82-42-936-1281 FAX +82-42-936-1284
E-mail: info-kr@hioki.co.jp

DISTRIBUTED BY