


- ✓ DC- and AC- Voltages
- ✓ DC- and AC- Currents
- ✓ Power up to 2500VA
- ✓ $\cos \varphi$ free selectable
- ✓ Energy with variable Time
- ✓ RTD- and Thermocouples
- ✓ Resistors and Capacitors
- ✓ Frequency generation
- ✓ IEEE 488, RS232

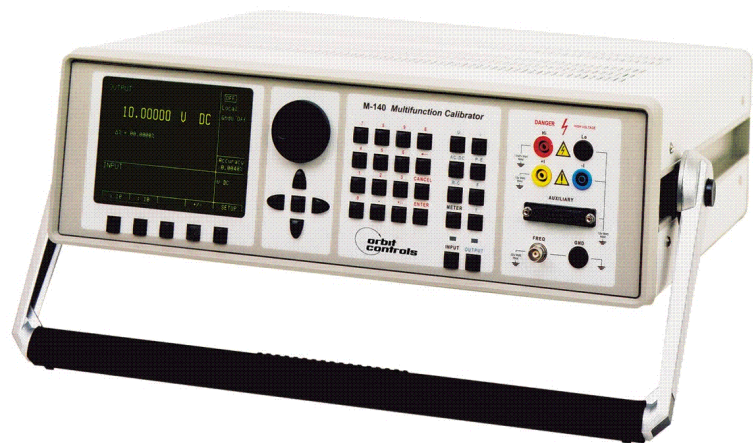

Model M-140 is a bus compatible multifunction calibrator for precise generation of electric units. It is mainly designed for calibration by manufacturers of electronic instrumentation. It also finds its application at laboratories, design and service departments as well as at institutions that have to frequently calibrate their equipment in accordance with their internal quality certification system.

Compared with standard calibrators, the model M-140 represents a new concept of multifunctional calibrators, which generate not only the standard electric parameters but also parameters for temperature and energy applications. Apart from this, the calibrator generates non-harmonic signals for the testing of equipment with non-zero distortion input signals. The signals can be generated with variable frequency, amplitude and pulse-width ratio.

The simulation of DIN thermocouples and RTD sensors is provided.

OCM-140 is a high accuracy and high stability instrument with easy operation, which can be used for the calibration of multimeters, analog instruments, panelmeters, clamp amperemeters, hand calibrators, wattmeters, electrometers, oscilloscopes, thermometers, dataloggers, X-Y recorders, etc.

A built-in multimeter function can be utilized for simultaneous testing-calibration of transmitters, regulators

and other controllers without the need of using supporting equipment.

VOLTAGE and CURRENT

The calibrator's main function is the generation of DC- and AC- voltage between 0 V and 1000 V and DC- and AC- currents from 0 A to 20 A. By using an optional output booster the currents from 50 μ A to 500A can be calibrated. The frequency range is programmable from 20Hz to 50kHz. The best accuracy for DC voltage is 0.0035%, for AC voltage 0.03%, for DC current 0.013% and for AC current 0.055%.

POWER and ENERGY

For calibration of energy measuring instruments with isolated voltage and current circuits the energy mode can be selected. The voltage is adjustable from 0,2V to 240V, the current from 2mA to 10A. The time can be set from 10 to 1999 sec.

Wattmeters and electrometers for measuring DC or AC power can be calibrated up to 240V and 20A with a phase setting from -1 to +1 with a resolution of 0,1% within a frequency range of 20Hz to 400Hz. The voltage output can be loaded with 30mA and permits a calibration of classic analog wattmeters.

TEMPERATURE

The calibrator can simulate RTD thermometers and DIN thermocouples R, S, B, J, K, T, E and N. The cold junction can be set with the keyboard directly as temperature or can be compensated automatically at the input terminals. The accuracy

of the RTD thermometers is 0.04°C to 0.5°C. The accuracy of thermocouples is 0.4°C to 2.9°C.

OTHER FUNCTIONS

A non-harmonic periodical signal with a defined crest factor can be generated and used for the calibration of multimeters, considering accuracy during measurements of distorted AC signals.

Resistors and capacitors can be simulated between 0 Ohm and 50 MOhm (accuracy of 0.03%) and 1 nF to 50 μ F (accuracy of 0.5%). The resistors can be used for AC signals up to 1kHz.

Precision frequency output 0.1Hz to 100kHz with adjustable amplitude 1mV to 10V as well as TTL frequency output 0.1Hz to 20MHz with fast edges are generated for frequency calibration purposes. These functions can be used for the calibration of input characteristics of instruments, signal conditioners, counters, oscilloscopes, etc.

The large-scale LCD display shows the menu steps, the generated parameters as well as other additional information. Some of the keys are directly assigned to frequently used functions.

Output ports GPIB – IEEE488 and RS232 are standard and permit to operate the calibrator in automatic testing set-ups.

The WinQbase is available for operation under Windows.

OPERATION

The instrument is operated via the keyboard at the front. The entry is supported by a large scale display with concentrated information.

Standard functions are integrated which simplify the operation during the calibration, such as entry of the absolute and relative tolerance and error band, calibration sequences, two- or four wire terminals, grounding terminals and other. Some of the keys are directly assigned to frequently used functions. The instrument is equipped with IEEE488 and RS232 data bus and is suitable for an automatic testing and calibrating operation.

BUILT-IN MULTIMETER

A multimeter with inputs for 0-20mA and 0-10V has an accuracy of 0.01% and is suitable for measuring standardized process signals from transmitters which are under test or calibration.

CALIBRATOR - TESTOR

OCM-140 can be programmed as a calibrator-testor with up to 10 steps of selected testing procedure. The end of the test sequence is terminated with a display record output of a type PASS/FAIL. The output relay allows to control additional equipment.

EASY TO USE

There are additional functions available, which simplify the use of the instrument, such as programming the relative error band, displaying the actual uncertainty of the generated signal, calibration procedures, etc.

The large-scale LCD display shows the menu steps, the generated parameters as well as other additional information. Some of the keys are directly assigned to frequently used functions. The WinQbase is available for operation under Windows.

SPECIFICATIONS

The stated errors are defined for an ambient temperature of $23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and after a warm-up time of 60 minutes. They contain the long time stability, the temperature coefficient, the load characteristics, the mains stability and the traceability to the national standards. The parameters are valid for 12 months.

DC - VOLTAGE		DC - CURRENT	
Range	% of Value + % of Range	Range	% of Value + % of Range
0 μ V - 20mV	0.05+0.0+10 μ V	0 μ A - 200 μ A	0.05+0.0+20nA
20mV - 200mV	0.03+0.0+10 μ V	200 μ A - 2mA	0.02+0.005
200mV - 2V	0.003+0.0008	2mA - 20mA	0.01+0.003
2V - 20V	0.003+0.0005	20mA - 200mA	0.01+0.003
20V - 240V	0.003+0.0005	200mA - 2A	0.015+0.005
240V - 1000V	0.003+0.0005	2A - 10A	0.02+0.01
		10A - 20A * ²	0.02+0.01

AC - VOLTAGE			AC - CURRENT		
Range	% of Value + % of Range	% of Value + % of Range	Range	% of Value + % of Range	% of Value + % of Range
	20Hz - 10kHz	10kHz - 50kHz		20Hz - 1kHz	1kHz - 5kHz
1mV - 20mV	0.2+0.05+20 μ V	0.2+0.1+20 μ V	1 μ A - 200 μ A	0.15+0.0+20nA	0.3+0.1+20 nA
20mV - 200mV	0.1+0.03+20 μ V	0.15+0.05+20 μ V	200 μ A - 2mA	0.07+0.01	0.2+0.05
200mV - 2V	0.025+0.0	0.05+0.01	2mA - 20mA	0.05+0.005	0.2+0.05
2V - 20V	0.025+0.005	0.1+0.03	20mA - 200mA	0.05+0.005	0.2+0.05
20V - 240V	0.025+0.01	---	200mA - 2A	0.05+0.005	---
240V - 1000V	0.03+0.02 * ¹	---	2A - 10A	0.1+0.03	---
			10A - 20A * ²	0.1+0.03	---

*¹ valid for $f < 1000\text{ Hz}$

*² with OUTPUT-ON can ON/OFF be max. 1/10.
Continuous Output of 20A for max. 30 sec.

By using the 500A-coil (Option M140-50) the corresponding ranges have to be multiplied by 50. Additional inaccuracy of 0.3% from value has to be added to the specifications.

FUNCTION SHAPE

Voltage Range: 1mV to 200V
 Current Range: 100µA to 2A
 Output Type of Signal: Squarewave positiv, negativ or symmetrical, saw, triangle and sine wave with cut tops.
 Accuracy of the Amplitude: 0.3%

RESISTORS (selectable to 5 decimal points)

Ranges: 0 Ohm - 50 MOhm

CAPACITY (selectable to 5 decimal points)

Ranges: 900 pF - 50 µF

RESISTORS		CAPACITY		
Range	Accuracy (% of Value)	Range	Accuracy (% of Value)	Max. Frequency (Hz)
0Ω - 100Ω	0.03 + 10mΩ	900pF - 2.5nF	0.5 + 15pF	1000
100Ω - 400Ω	0.015	2.5nF - 10nF	0.5	1000
400Ω - 2kΩ	0.015	10nF - 50nF	0.5	1000
2kΩ - 10kΩ	0.015	50nF - 250nF	0.5	1000
10kΩ - 40kΩ	0.015	250nF - 1µF	0.5	1000
40kΩ - 200kΩ	0.015	1µF - 3.5 µF	1	300
200kΩ - 1MΩ	0.03	3.5 µF - 5µF	1	300
1MΩ - 4MΩ	0.03	5 µF - 10µF	1.5	300
4MΩ - 20MΩ	0.05	10 µF - 50 µF	1.5	300
20MΩ - 50MΩ	0.2			

Max. voltage across the load is 8V p-p

Max. voltage across the load is 8V p-p

FREQUENCY						
Type	Frequency Range	Frequency Accuracy	Amplitude	Amplitude Accuracy	Ratio	Ratio Accuracy
PWM (POS, NEG, SYM)	0.1 Hz-100 kHz	0.005 %	1mV-10V	0.1%	0.1 - 0.99	0.0005
HF *1	0.1 Hz - 20 MHz	0.005 %	5V s-s	10	--	--

*1 rise time < 5 ns

Frequency Output with constant Amplitude

Output Impedance < 100 Ω.
 Frequency selection to 3 decimal points

Frequency Output with variable Amplitude

Output Impedance: 10V Range: < 200 mΩ
 Other Ranges: < 100 Ω.

DC – POWER and ENERGY			AC – POWER and ENERGY		
Output	Range	Accuracy (%)	Output	Range	Accuracy (%)
Voltage	0.2V - 240V	0.004 bis 0.015	Voltage	0.2V - 240V	0.03 - 0.12
Current	2mA - 10A	0.05 bis 0.15	Current	2mA - 10A	0.05 - 0.15
			Frequency	40 - 400 Hz	0.005%
			cos φ	-1 ... +1	0.005 - 0.0005
			Phase	0 - 360 °	0.15 - 0.25

In the energy mode of operation the time can be set from 10 sec to 1999 sec.

The accuracy at the AC Power depends on the set Voltage, Current and Phase. The best accuracy is 0.08%.

The accuracy in the Energy Mode of operation depends on the set Voltage, Current, Phase and Time. The best accuracy is 0.09%.

TEMPERATURE SENSORS

The RTD Thermometers and the Thermocouples are in accordance with IST 90, PTS 68.

RTD Thermometers: Pt 1.385, Pt 1.392, Ni Temperature Range: -200 to +850 °C
 Range of the RO constant: 20 Ω to 2 kΩ Temperature Accuracy: 0.04 °C to 0.5 °C

THERMOCOUPLES					
R	Range (°C)	-50 ... 0	0 ... 400	400 ... 1000	1000 ... 1770
	Max. Error (°C)	2.9	2.1	1.4	1.7
S	Range (°C)	-50 ... 0	0 ... 250	250 ... 1400	1400 ... 1770
	Max. Error (°C)	2.7	2.1	1.7	2.0
B	Range (°C)	400 ... 800	800 ... 1000	1000 ... 1500	1500 ... 1820
	Max. Error (°C)	2.8	1.8	1.6	1.8
J	Range (°C)	-210 ... -100	-100 ... 150	150 ... 700	700 ... 1200
	Max. Error (°C)	0.9	0.5	0.6	0.7
T	Range (°C)	-200 ... -100	-100 ... 0	0 ... 100	100 ... 400
	Max. Error (°C)	0.9	0.5	0.4	0.4
E	Range (°C)	-250 ... -100	-100 ... 280	280 ... 600	600 ... 1000
	Max. Error (°C)	1.6	0.4	0.5	0.5
K	Range (°C)	-200 ... -100	-100 ... 480	480 ... 1000	1000 ... 1372
	Max. Error (°C)	1.0	0.6	0.7	0.8
N	Range (°C)	-200 ... -100	-100 ... 0	0 ... 580	580 ... 1300
	Max. Error (°C)	1.2	0.7	0.6	0.8

MULTIMETER		
Type	Range	Accuracy
DC - Voltage (V)	0 ... ± 12V	0.01% + 300 μV
DC - Voltage (mV)	0 ... ± 2V	0.02% + 7μV
DC - Current	0 ... ± 25mA	0.015% + 300 nA
Frequency	1 Hz - 15 kHz	0.005%
Resistor	0 ... 2 kOhm	0.02% + 10 mΩ
Temperature (Pt Sensor)	-150 ... +600 °C	0.1 °C
Temperature (T/C Sensor)	-250 ... +1820 °C	0.4 bis 4 °C, depends on sensor
SGS Sensors ^{*1}	Depends on the sensor type	0.05% + 10 μV + sensor error

*1 Voltage: 2-10V
 Max. Current: 40mA
 Input Impedance: min. 100 Mohm
 Sensitivity: 0.5 to 100 mV/V
 Display units: selectable
 Output Function: Relay

Further Specifications

Warm-up time for full specifications: 60 min.
 Working Temperature: 23 ± 10 °C
 Storing Temperature: 0 to 40 °C @ max. 80 % r.F.
 Reference Temperature: 23 °C ± 2 °C
 Ambient Pressure: 860 to 1060 HPa
 Dimensions: 450 x 480 x 150 mm, weight 28 kg
 Supply: 115V/230V, ± 10%, 50-60Hz, 250 VA at the full load.

© orbit controls 2111