

15KV High Voltage
150MHz Bandwidth

DP-15K
15KV / 35MHz



15KVp-p, High Voltage Model .

Input Impedance 50M Ω //1.3PF

x100, x1000 Attenuator, Easy to Convert.

*Separating Design(Standard No.114205)
Convenient & Durable.*


DP-15K Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-15K
Differential Voltage DC + AC peak	15KV
Bandwidth (50Ω load -3dB)	35MHz(25MHz at x100)
Common Mode Voltage DC + AC peak	15KV
Common Mode Voltage RMS CAT II / CAT III	5.5KVrms
Attenuation (Switchable)	X100, X1000
Input R (Each Input)	25MΩ ± 2%
Input C (Each Input)	2.6PF ± 5%
Maximum Operation Voltage (DC+ AC peak)	≤ 1.5KV at x 100 ≤ 15KV at x 1000
Common Mode Rejection Ratio (CMRR)	60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1MHz: > 300 : 1
Noise (Into 50Ω Load)	≤ 1.0m Vrms
Input Impedance (Between Input)	50MΩ // 1.3 PF
Accuracy (at 20~30°C 70%RH after 20 minutes)	≤ ± 2%
Maximum Output Voltage	≤ ± 8V
Power Source	External 9V DC Adaptor
Other	Over Range Indicate



ACCESSORIES:

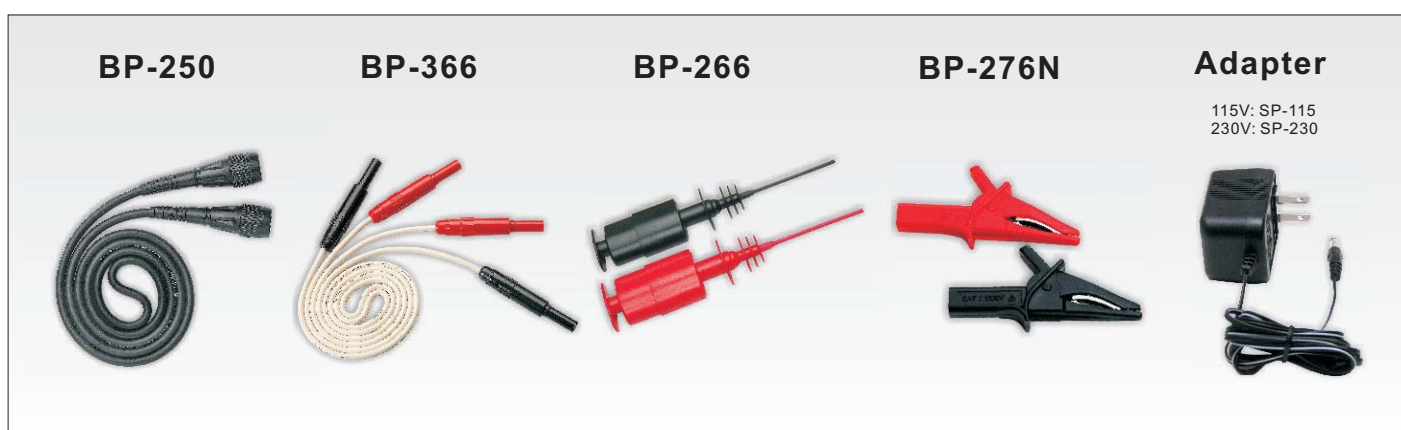

SALES AGENT



C/ IKEA, 51 - LOCAL B - 48940 LEIOA - VIZCAYA

TFNO.: 944803040 - FAX: 944348191

Email: isotest@isotest.es

<http://www.isotest.es>